

STANLEY®

PETROL OUTDOOR TOOLS



STANLEY® CHAIN SAW

SXOP100010E

SAFE BREAK MX2.

For safety and maximum protection.

ANTI-VIBRATION SYSTEM.

Absorption and amortisation of vibrations for better control and easy handling.

JET FORCE ENGINE.

Gives you more power with less consuming of fuel and reduced emissions.

OREGON®.

High quality OREGON® chain and sword.

RECOIL STARTER.

Allows smooth and very easy start.

DIGITAL IGNITION.

Reliable start even in cold weather conditions.



TECHNICAL SPECIFICATIONS



JETForce³ Engine

Revised and refined fuel combustion, lower fuel consumption and reduced exhaust emission levels.



ASC System

Provides optimal engine performance with the automatic engine setting. No need to spend time on carburetor adjustments.



AIRFlow³

Reduced wear and longer operating time between filter cleanings because of the centrifugal air cleaning process.



ANTI Vib³

An innovative and proven engine suspension, which absorbs vibrations to give maximum protection to the user's arms and hands.



MODEL	SCS-52 JET	SCS-46 JET
Displacement	51.5 cm ³	45.1 cm ³
Power	2.1 kW	1.8 kW
Max. Speed	11000 rpm	11000 rpm
Engine	2 Stroke / Air cooling	2 Stroke / Air cooling
Fuel / Oil Ratio	40:1	40:1
Cutting Length	430 mm	360 mm
SKU	SXOP100010E	SXOP100020E

STANLEY® HEDGE TRIMMER

SXOP200010E



TECHNICAL SPECIFICATIONS



MODEL	SHT-26-55
Displacement	26 cm ³
Power	750 W
Max. Speed	10000 rpm
Engine	2 Stroke / Air cooling
Fuel / Oil Ratio	40:1
Cutting Length	550 mm
SKU	SXOP200010E



STANLEY® BRUSH CUTTER

SXOP200055E

JET FORCE ENGINE.

Gives you more power with less consuming of fuel and reduced emissions.

RECOIL STARTER.

Allows smooth and very easy start.

SOFT GRIP.

Handle with cockpit operation for comfortable handling.

ANTI-VIBRATION SYSTEM.

Absorption and amortisation of vibrations for better control and easy handling.

QUICK SHAFT.

For easy and quick disassembly for storing.

TRIMMER.

Included with tool.

TECHNICAL SPECIFICATIONS



MODEL	SPS-1400
Displacement	51.2 cm ³
Power	1.4 kW
Max. Speed	10500 rpm
Engine	2 Stroke / Air cooling
Fuel / Oil Ratio	40:1
Cutting Siameter / Lawn T.	255 mm / 430 mm
SKU	SXOP200055E



STANLEY® LAWN TRIMMER

SXOP200030E

SECOND HANDLE.

Ergonomic second handle for better tool control.

SOFT GRIP.

Handle with cockpit operation for comfortable handling.

JET FORCE ENGINE.

Gives you more power with less consuming of fuel and reduced emissions.

QUICK SHAFT.

For easy and quick disassembly for storing.

RECOIL STARTER.

Allows smooth and very easy start.

TECHNICAL SPECIFICATIONS




MODEL	STR-750
Displacement	26 cm ³
Power	750 W
Engine	2 Stroke / Air cooling
Max. Speed	12500 rpm
Fuel / Oil ratio	40:1
Cutting line	3 m / 2 mm
SKU	SXOP200030E



STANLEY® 4IN1 GARDEN TOOL

SXOP200040E

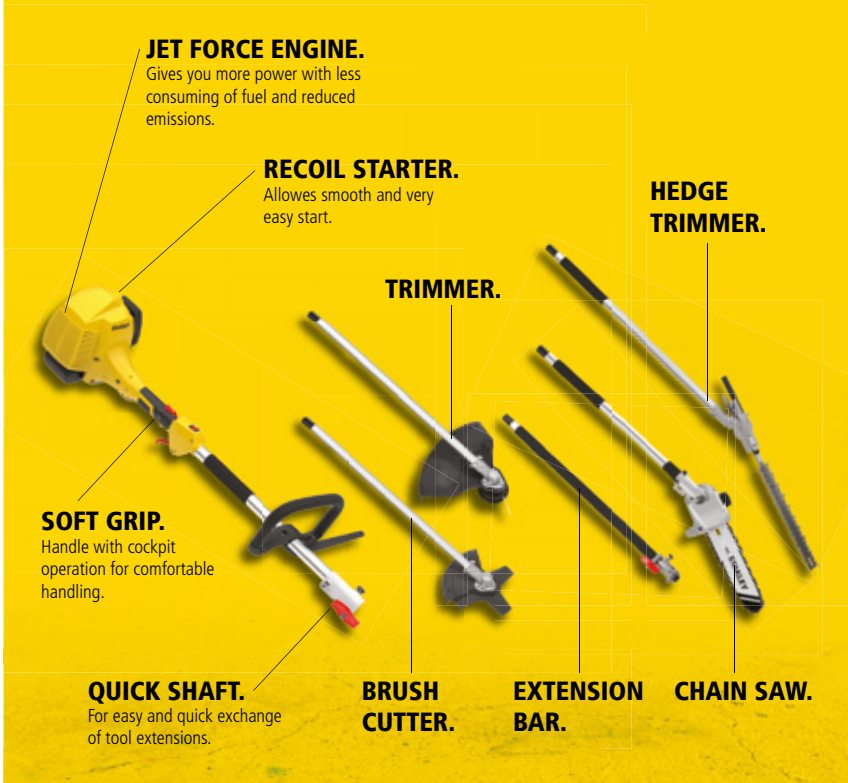

TECHNICAL SPECIFICATIONS

- Pole Chainsaw**

Cutting length 21 cm
Oregon chain and bar
150ml lubrication oil tank
Cutting head up to 90°
With extension bar.



- Pole Hedge Trimmer**

Cutting length 450 mm
2.4 cm max cutting diameter
Adjustable cutting angle for 180°
With extension bar.



- Lawn Trimmer**

High-grade plastic
2x 3 Meter Nylon
2 mm Nylon diameter



- Brush Cutter**

4 teeth Blade
23 cm Blade diameter
1.6 mm Blade thickness



MODEL	STR-4IN1
Displacement	26 cm ³
Power	750 W
Max. speed	12500 rpm
Engine	2 Stroke / Air cooling
Fuel / Oil ratio	40:1
SKU	SXOP200040E



STANLEY® LEAF BLOWER

SXOP200020E

QUICK SETUP.

Conversion between the Blower function and Vacuum is quick and easy.

RECOIL STARTER.

Allows smooth and very easy start.

MULTIFUNCTIONAL HANDLE.

Comfortable ergonomic handle with cockpit operation.

JET FORCE ENGINE.

Gives you more power with less consuming of fuel and reduced emissions.

40L COLLECTION BAG.



TECHNICAL SPECIFICATIONS

- Vacuum
- Leaf Shredder
- Leaf Blower



MODEL	SLB-3IN1
Displacement	26 cm ³
Power	750 W
Max. Speed	8000 rpm
Engine	2 Stroke / Air cooling
Air Volume	10 m ³ /min
Air Velocity	70 m/s
Dust Bag	40 L
Three Functions	Leaf Blower, Vacuum, Shredder
Chopping ratio	8:1
SKU	SXOP200020E



STANLEY® TILLER

SXOP400010E

RECOIL STARTER.

Allows smooth and very easy start.

STEADY GRIPS.

Adjustable for convenient work.

"DEAD MAN" CIRCUIT STOP.

Automatic blade stop.

RUBBER WHEEL.

Improves balance and control.

STEEL BLADES.

Robust and long life cultivator steel blades.



TECHNICAL SPECIFICATIONS

- Transported Wheels
- Adjustable Working Depth
- 4x4 Knives
- 4x6 Knives



2.5
hp



MODEL	SGT-25-450 V	SGT-25-450 H	SGT-51-820 H
Displacement	98 cm ³	94 cm ³	196 cm ³
Power	1.8 kW	1.8 kW	3.8 kW
Engine	4 Stroke /Air cooling	4 Stroke /Air cooling	4 Stroke /Air cooling
Engine Power	2.5 hp	2.5 hp	5.1 hp
Fuel Tank Capacity	1 L	1.6 L	3.6 L
Tilling Width	450 mm	450 mm	300 / 560 / 820 mm
Tilling Blade Diameter	260 mm	260 mm	300 mm
Knives	4x4	4x4	4x6
SKU	SXOP400010E	SXOP400020E	SXOP400030E

STANLEY® PLATE COMPACTOR

SXOP300010E



TECHNICAL SPECIFICATIONS

Paving Pad Kit
Folding Wheels Kit
Automatic Oil Stop



13000 N Force

Compact granular soils and crushed aggregate up to 30 cm deep. High compacting force creates a solid foundation for walkways, patios, landscaping, and more.

Strong Construction

Heavy-duty shock mounts provide vibration isolation in the components and engine, preventing component wear and reducing operator fatigue.

Watertank

18 Liter water tank and sprayer is ideal for working on a variety of materials. Made from durable plastic.



MODEL	SGC-13000N-T	SGC-11000N-T	SGC-8000N
Displacement	196 cm ³	163 cm ³	87 cm ³
Power	4.8 kW	4.1 kW	2.1 kW
Max. Speed	5500 rpm	5500 rpm	5900 rpm
Engine	4 Stroke / Air cooling	4 Stroke / Air cooling	4 Stroke / Air cooling
Engine power	6.5 hp	5.5 hp	2.8 hp
Plate size	540x420 mm	530x370 mm	495x320 mm
Centrifugal force	13000 N	11000 N	8000 N
Compacting depth	30 cm	25 cm	25 cm
Travel speed	15 m/min	25 m/min	25 m/min
SKU	SXOP300010E	SXOP300020E	SXOP300030E

STANLEY® SNOW THROWER

SXSB500010E



RECOIL STARTER.

Allows smooth and very easy start.

SPEEDMASTER.

Different working speeds.

IMPELLER FAN.

Discharging dry or wet snow up to 10m.

DISCHARGE LEVER.

Fast and simple change of discharge direction.

AUGER SCREW.

Designed for breaking the snow for better throwing.

HEAVY-TREAD TIRES.

For excellent traction.

TECHNICAL SPECIFICATIONS

• Self-Propelled



MODEL	SPT-163-560	SPT-182-570	SPT-196-570	SPT-270-720	SPT-302-720
Displacement	163 cm ³	182 cm ³	196 cm ³	196 cm ³	302 cm ³
Power	4 kW	4.5 kW	4.8 kW	6.7 kW	7.5 kW
Engine	4 Stroke / Air cooling	4 Stroke / Air cooling	4 Stroke / Air cooling	4 Stroke / Air cooling	4 Stroke / Air cooling
Engine Power	5.5 hp	6 hp	6.5 hp	9 hp	10 hp
Fuel Tank Capacity	3.6 L	3 L	3.6 L	6 L	4 L
Clearing w./ Intake Height	560 / 400 mm	570 / 535 mm	570 / 535 mm	720 / 535 mm	720 / 535 mm
Max Discharge Distacne	10 m	12 m	12 m	12 m	12 m
Gears	5 For. / 2 Back	6 For. / 2 Back	6 For. / 2 Back	6 For. / 2 Back	6 For. / 2 Back
SKU	SXSB500010E	SXOP400020E	SXOP400050E	SXOP400030E	SXOP400040E





info@keeandgo.com | www.keeandgo.com

